ILPRO500

M-TECH BEZPRZEWODOWA PODKŁADKA ŁADUJĄCA

Instrukcja obsługi

DOSTARCZONE AKCESORIA:

- Zasilacz sieciowy USB:
  Wejście: 100-240 V ~ 50/60 Hz 0,8 A
  Wyjście: PD 20 W 5 V DC 3,0 A; 9 V prądu stałego 2,22 A; 12 V DC 1,67 A, maks. 20 W
- Przewód ładowarki USB:
  PD 20W USB-C na USB-C x 1m

CECHY:

- Ładuje dwa urządzenia jednocześnie
- Współpracuje z kompatybilnymi telefonami komórkowymi
- Odporność na wstrząsy IK08
- Silne magnesy z tyłu umożliwiają łatwy montaż na powierzchniach magnetycznych, a wbudowane otwory na śruby umożliwiają montaż na stałe


DANE TECHNICZNE:

- Materiał:
  Ultra wytrzymała konstrukcja z nylonu, aluminium i TPR
- Zasilacz sieciowy:
  Wejście: 100-240 V ~ 50/60 Hz 0,8 A
  Wyjście: PD 20 W 5 V DC 3,0 A; 9 V prądu stałego 2,22 A; 12 V DC 1,67 A, maks. 20 W
  Przewód ładowarki USB: PD 20 W USB-C na USB-C x 1 m
- W przypadku ładowania za pomocą podkładki bezprzewodowej:
  Czas ładowania: Około 3,0–5,0 godzin, w zależności od akumulatora – temperatura otoczenia będzie miała wpływ na okres ładowania i rozładowywania akumulatora
- Temperatura pracy:
  -5°C do +45°C
- Wymiary podkładki ładującej:
  265 x 110 x 29 mm
- Masa netto: 400g (bez opakowania)

UTYLIZACJA I OCHRONA ŚRODOWISKA

- Nie wyrzucaj zużytych baterii razem z odpadami domowymi
- Aby dowiedzieć się, jaki jest najlepszy sposób recyklingu, skontaktuj się z lokalnymi zakładami recyklingu
- Ta podkładka ładująca zawiera substancje, które w przypadku niewłaściwej utylizacji mogą być szkodliwe dla środowiska i ludzi

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

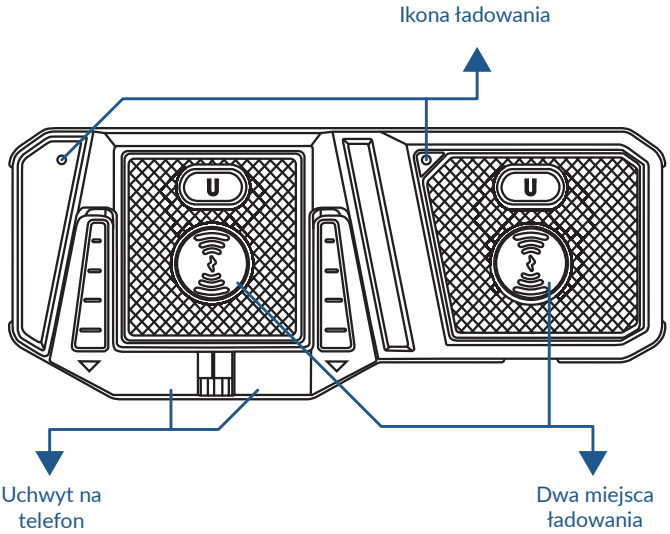

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

ILPRO500
M-TECH WIRELESS CHARGING PAD
User Manual

SUPPLIED ACCESSORIES:

- USB Mains Adaptor:
  Input: 100-240V~50/60Hz 0.8A
  Output: PD 20W 5V DC 3.0A; 9V DC 2.22A; 12V DC 1.67A, 20W Max
- USB Charger Lead:
  PD 20W USB-C to USB-C x 1m

FEATURES:

- Charges two devices simultaneously
- Works with compatible mobile phones
- IK08 shock resistance
- Strong magnets on the rear allow for easy mounting on magnetic surfaces as well as built-in screw holes for permanent mounting


SPECIFICATIONS:

- Material:
  Ultra tough nylon, aluminium & TPR construction
- AC adapter:
  Input: 100-240V~50/60Hz 0.8A
  Output: PD 20W 5V DC 3.0A; 9V DC 2.22A; 12V DC 1.67A, 20W Max
  USB Charger Lead: PD 20W USB-C to USB-C x 1m
- If charging by wireless pad:
  Charging time: Approx 3.0-5.0 hours depending the on battery pack - environmental temperature will affect the charging and discharging period of the battery
- Operating temperature:
  -5°C to +45°C
- Charging pad measurements:
  265 x 110 x 29 mm
- Net weight: 400g (packaging not included)

DISPOSAL AND ENVIRONMENTAL PROTECTION

- Do not dispose of used batteries with domestic waste
- Please check with local recycling plants for the best way to recycle
- This charging pad contains substances that may be harmful to the environment and humans if disposed of inappropriately

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

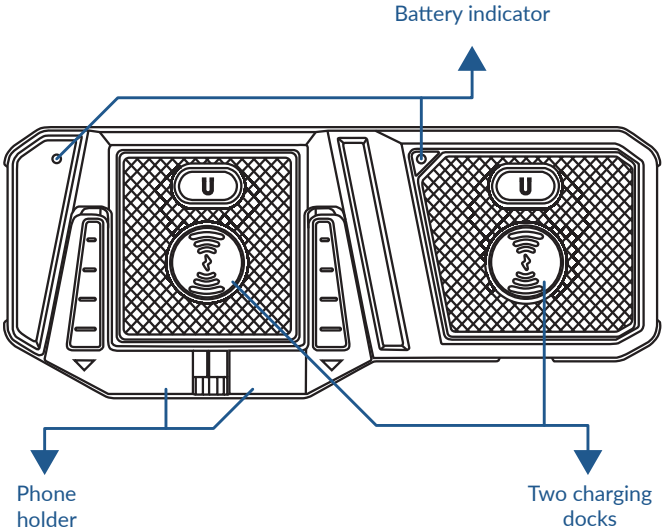

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl