ILPRO105
M-TECH LAMPA INSPEKCYJNA
Instrukcja obsługi

Przed pierwszym użyciem naładuj baterię do pełna, a następnie całkowicie ją rozładuj.

ŚRODKI OSTROŻNOŚCI:

- Unikaj używania lampy w pobliżu materiałów łatwopalnych lub gazów.
- Upewnij się, że źródła światła pozostają odsłonięte podczas pracy.
- Korzystaj tylko z dostarczonych akcesoriów do ładowania lampy.
- Trzymaj lampę poza zasięgiem osób postronnych, szczególnie dzieci.
- Unikaj kierowania światła bezpośrednio w oczy ludzi i zwierząt.
- Przed użyciem ładowarki zawsze sprawdź główny kabel. W przypadku wykrycia uszkodzeń, wymień ładowarkę.
- Wyrzucaj zużyte baterie do wyznaczonych punktów odbioru, a nie do odpadów domowych.

PROJEKT LAMPY I AKCESORIA:

- Główne źródło światła z diodą LED COB o jasności 500 lumenów + latarka o jasności 200 lumenów
- Stabilne haki do zawieszania
- System ładowania baterii 5V
- Mocne magnesy obrotowe na spodzie
- Certyfikat IP54

DANE TECHNICZNE:

- Akumulator litowo-jonowy o pojemności 3,7 V i 2500 mAh
- LED: Dioda LED COB o mocy 5W
- Latarka LED o mocy 2W
- Przełącznik regulacji jasności: 10-100%
- Jasność: Około 500 lumenów dla głównego reflektora
- Około 200 lumenów dla górnej latarki
- Zakres temperatury otoczenia: -10° do +45°C
- Czas użytkowania: Od 3 do 20 godzin
- Czas użytkowania latarki: Od 8 do 48 godzin
- Czas ładowania: Około 4 godzin
- Klasa ochrony: III
- Wejście ładowania: 5V 1000mA

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

ŁADOWANIE:

- Zaleca się w pełni naładować baterie przed pierwszym użyciem lampy.
- Ładuj lampę co trzy miesiące, aby przedłużyć żywotność baterii.

ŁADOWANIE ZA POMOCĄ ŁADOWARKI USB 5V DC:

- Włóż wtyczkę zasilania do głównej ładowarki USB.
- Włóż kabel ładowarki do portu USB C.
- Stan ładowania baterii można odczytać z wskaźnika stanu baterii. Jeśli wszystkie 4 diody LED są włączone, bateria jest w pełni naładowana.

UŻYCIE:


PRZEŁĄCZNIK WŁĄCZ/WYŁĄCZ:

- Naciśnij raz: Włącz główny reflektor LED COB
- Naciśnij dwa razy: Włącz latarkę LED
- Naciśnij trzy razy: Wyłącz

Uwaga: Jeśli zostanie w jakimkolwiek trybie przez więcej niż 3 sekundy, następne naciśnięcie wyłączy światło.

PRZEŁĄCZNIK REGULACJI JASNOŚCI:

- Regulacja jasności głównego reflektora LED COB: 10% - 100%
- Regulacja jasności latarki LED: 10% - 100%

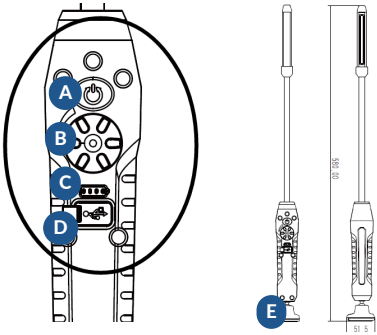

ELEMENTY:

A: Główny przełącznik (Kontroluje WŁĄCZANIE/ WYŁĄCZANIE głównego LED i latarki LED)
B: Przełącznik Regulacji Jasności
C: Wskaźnik Stanu Baterii
D: Punkt ładowania - port USB C
E: Obracająca się Magnetyczna Podstawa - o 360°

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

ILPRO105
M-TECH INSPECTION LAMP
User Manual

Before initial use, please ensure to fully charge and discharge the batteries.

SAFETY PRECAUTIONS:

- Avoid using the lamp near flammable materials or gases.
- Ensure that the light sources remain uncovered during operation.
- Utilize only the provided accessories for recharging the lamp.
- Keep the lamp out of reach of unauthorized individuals, particularly children.
- Avoid directing the light directly into anyone's eyes, including your own or animals.
- Prior to charger usage, always inspect the main cable. Replace the charger if any damage is detected.
- Dispose of used batteries at designated collection points rather than with domestic waste.

LAMP DESIGN AND ACCESSORIES:

- Main light reflector with a brightness of 500 lumens + flashlight with a brightness of 200 lumens
- Stable hanging hooks
- 5V battery charging system
- Strong rotating magnets at the bottom
- IP54 protection rating

TECHNICAL DATA:

- 3.7V rechargeable lithium-ion battery, 2500mAh
- LED: 5W High-efficiency COB LED
- 2W High-efficiency LED flashlight
- Dimming switch: 10% - 100%
- Brightness: Approximately 500LM for the main reflector
- Approximately 200LM for the top flashlight
- Ambient temperature range: -10° to +45°C
- Usage time: 3 to 20 hours
- Flashlight usage time: 8 to 48 hours
- Charging time: Approximately 4 hours
- Protection class: III
- Charging input: 5V 1000mA

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

RECHARGING:

- It is recommended to fully charge the batteries before initial lamp usage.
- Recharge the lamp every three months to preserve battery lifespan.

CHARGING VIA 5V DC USB CHARGER:

- Insert the power into the main USB charger.
- Insert the charger cable into the USB C port.
- Battery charging status can be determined by reading the battery status. If all 4 LED lights are on, the battery is fully charged.

USAGE:


POWER ON/OFF SWITCH:

- Press once: Main COB LED ON
- Press twice: LED flashlight ON
- Press three times: OFF

Note: If left in any mode for more than 3 seconds, the next press will turn off the light.

BRIGHTNESS ADJUSTMENT SWITCH:

- Main COB LED brightness adjustment: 10%-100%
- Flashlight brightness adjustment: 10%-100%

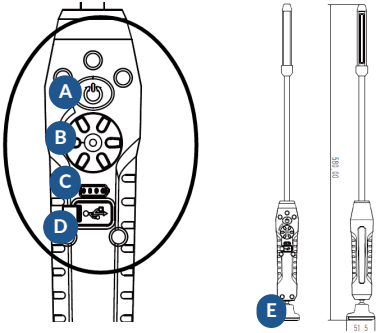

COMPONENTS:

A: Main Switch (Controls ON/OFF of main LED and LED flashlight)
B: Brightness Adjustment Switch
C: Battery Status Indicator
D: Charging Point - USB C port
E: Rotating Magnetic Base - 360 degrees

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl