INSTRUKCJA MONTAŻU I OBSŁUGI LAMP ROBOCZYCH ŚWIATŁA WSTECZNEGO MARKI M-TECH.

DZIĘKUJEMY ZA ZAKUP LAMP M-TECH LED!

Skład zestawu:

- lampa robocza LED
- komplet elementów montażowych

Przed instalacją:

Przed rozpoczęciem instalacji sprawdź lokalne przepisy i regulacje oraz przepisy obowiązujące w regionie, do którego Twój pojazd może podróżować z lampami do jazdy (lub do pracy). Upewnij się, że są one zgodne z przepisami. Zapoznaj się z całą dokumentacją montażową. Upewnij się, że wymiary i masa lamp oraz urządzenia są odpowiednie dla Twojego pojazdu. Może występować lekka wilgoć wewnątrz lampy, która zostanie usunięta z wentylacji po 2-4 godzinach pracy.

Zakres napięcia roboczego: 10-32 V DC

Montaż:

Przed zamocowaniem lamp roboczych należy przymierzyć je w wybrane miejsce. Ustalić miejsce i pozycję w jakiej będą zamontowane. Możliwe, że pojawi się potrzeba wykonania otworów na przewody bądź śruby mocujące.

Zakres napięcia roboczego: 10-32 V DC

Polaryzacja:

- przewód czerwony – plusowy
- przewód czarny – minusowy



Minus
Driving light / Spot Light / Flood Light
Pomarańczowe światło pozycyjne
Białe / czerwone światło pozycyjne

Zaleca się montaż dodatkowego bezpiecznika na przewodzie plusowym!

Gwarancja:

Lampy objęte są 12 miesięczną gwarancją na podstawie dowodu zakupu (paragon / kopia F-Vat). Gwarancja obejmuje wady fabryczne. Nie obejmuje wad powstałych w sposób użytkowania niezgodny z przeznaczeniem lub usterek mechanicznych.

Reklamujący zobowiązany jest dostarczyć na koszt własny reklamowany towar. Producent wyłącza możliwość zwrotu kosztów montażu, demontażu, robocizny w przypadku reklamacji. Termin gwarancji nie ulega przedłużeniu po dokonaniu wymiany towaru w ramach gwarancji.

Uwagi:



Nie kierować wody pod ciśnieniem bezpośrednio na lampy robocze.



Nigdy nie patrz bezpośrednio w stronę włączonej lampy LED.



Przechowywać w miejscu niedostępnym dla dzieci.



Nie używać do czyszczenia środków chemicznych, przemywać zwilżoną gąbką.



Lampa robocza LED nagrzewa się w czasie pracy.



Produkt może być stosowany wewnątrz i na zewnątrz pomieszczeń, ale nie wolno zanurzać go w wodzie ani innej cieczy.

WLRP101



Driving beam



Flood beam




Spot beam








WLRP102



Driving beam



Flood beam



Spot beam













Uchwyt z regulacją, ułatwiający montaż w różnych kierunkach.



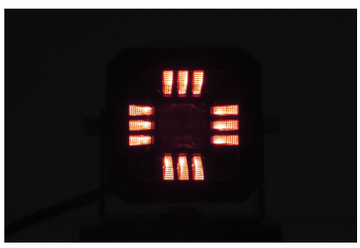

M-Tech Poland Sp. z o.o.
ul. Redena 10 41-807 Zabrze, Poland
+48 32 284 10 10
+48 32 757 11 99
info@m-tech.pl
www.m-tech.pl

3 IN CUBE LED WORK

IP67&IP69K

ECE R10
ECE R148 reverse light (Flood beam)
ECE R148 rear position light (Flood beam)



WLRP101 (flood)




WLRP102 (flood)


Informacje

KOD PRODUKTU	WIĄZKA ŚWIATŁA	MOC	CHIP LED	ILOŚĆ LED	LUMENY
WLRP101 WLRP102 *ECE R10* *ECE R148*	Driving Beam	23W + 4W	SMD	1 + 12 szt.	1500 lm
	Spot Beam	23W + 4W	SMD	1 + 12 szt.	1500 lm
	Flood Beam	23W + 4W	SMD	1 + 12 szt.	1500 lm


Materiał obudowy: aluminium Materiał soczewki: PC

Wymiary

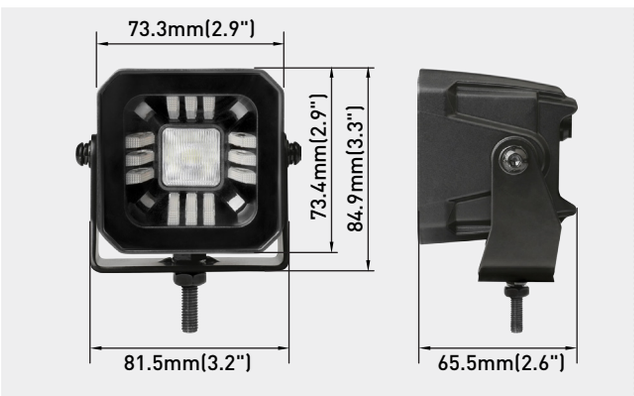


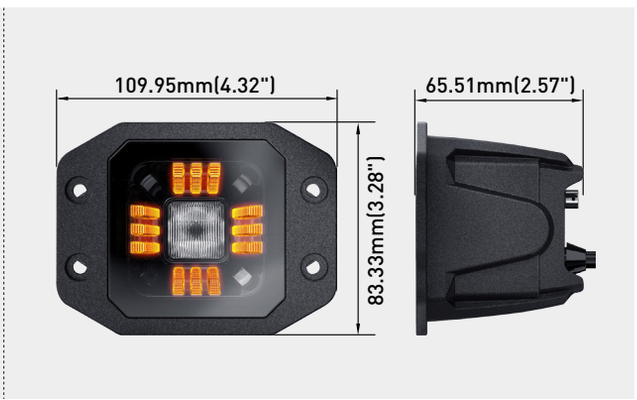


SPOT BEAM

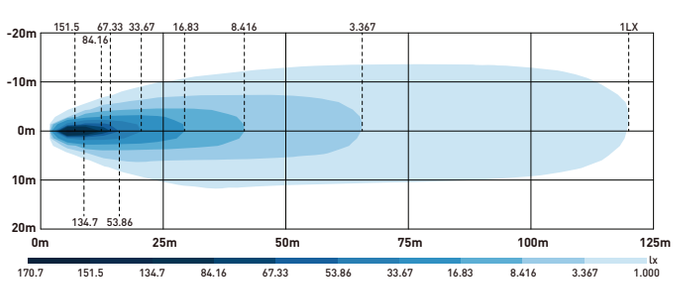

DRIVING BEAM

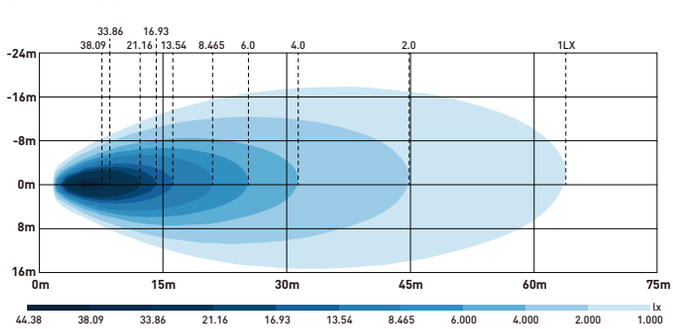

FLOOD BEAM

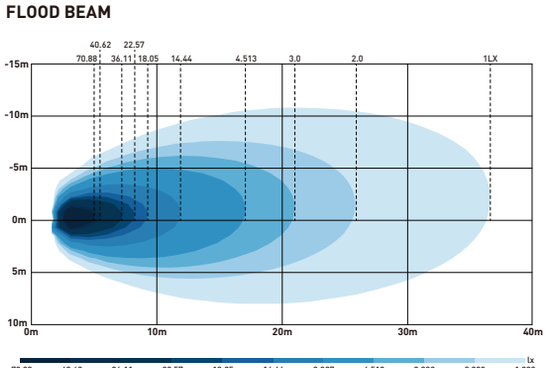

M-Tech Poland Sp. z o.o.
ul. Redena 10 41-807 Zabrze, Poland
+48 32 284 10 10
+48 32 757 11 99
info@m-tech.pl
www.m-tech.pl

INSTALLATION AND USER MANUAL FOR REVERSING LIGHT WORK LAMPS BY M-TECH.

THANK YOU FOR PURCHASING M-TECH LED LAMPS!

CONTENTS:

- LED lamp
- Mounting elements

Before installation:

Before starting the installation, please check your local laws and regulations as well as regulations in a region where your vehicle may travel with the driving or work lights installed. Make sure they comply with the regulations. Please familiarize yourself with the entire installation manual. Ensure that the dimensions and weight of the lamps and equipment are suitable for your vehicle. Be aware there may be slight moisture inside the lamp, which will be removed from the ventilation from 2 to 4 hours of operation.

Operating voltage range: 10-32V DC

Installation:

Determine the installation location, use an appropriate drill to make 1 or 3 holes, and tighten the locking nuts afterwards. Before installing the work lights, fit them into the chosen location. Determine the position in which they will be placed at. It may be necessary to create holes for wires or mounting screws.

Polarity:

- Red wire - positive (+)
- Black wire - negative (-)



Negative
Driving light / Spot Light / Flood Light
Amber position light
White / red position light

It is recommended to install an additional fuse on the positive wire!

Warranty:

The lights are covered by a 12-month warranty based on the proof of purchase (receipt / copy of VAT invoice). The warranty covers factory defects and does not cover defects caused by improper use or mechanical damage.

The claimant is responsible for delivering the claimed goods at their own expense. The manufacturer excludes the possibility of reimbursing installation costs, removal, or labor costs in case of a warranty claim. The warranty period is not extended after the exchange of goods under warranty.

Notes:



Do not point pressurised water directly at the working lamps



Never look directly into a switched-on LED lamp.



Keep out of the reach of children.



Do not use chemicals for cleaning, wash with a damp sponge.



The LED work lamp heats up during operation.



The product can be used indoors and outdoors, but must not be immersed in water or any other liquid.

WLRP101



Driving beam



Flood beam



Spot beam













Bracket Adjustable to make it easy to for installation on different direction.


WLRP102



Driving beam




Flood beam





Spot beam









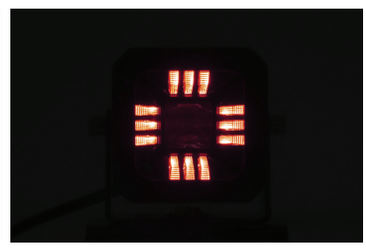

M-Tech Poland Sp. z o.o.
ul. Redena 10 41-807 Zabrze, Poland
+48 32 284 10 10
+48 32 757 11 99
info@m-tech.pl
www.m-tech.pl

3 IN CUBE LED WORK

IP67&IP69K

ECE R10
ECE R148 reverse light (Flood beam)
ECE R148 rear position light (Flood beam)



WLRP101 (flood)




WLRP102 (flood)

Information


ITEM NO.	BEAM PATTERN	WATTAGE	CHIP LED	LED QUANTITY	EFFECTIVE LUMEN
WLRP101 WLRP102 *ECE R10* *ECE R148*	Driving Beam	23W + 4W	SMD	1 + 12 pcs	1500 lm
	Spot Beam	23W + 4W	SMD	1 + 12 pcs	1500 lm
	Flood Beam	23W + 4W	SMD	1 + 12 pcs	1500 lm

- Housing Material: Aluminum - Lens Material: PC


Dimensions

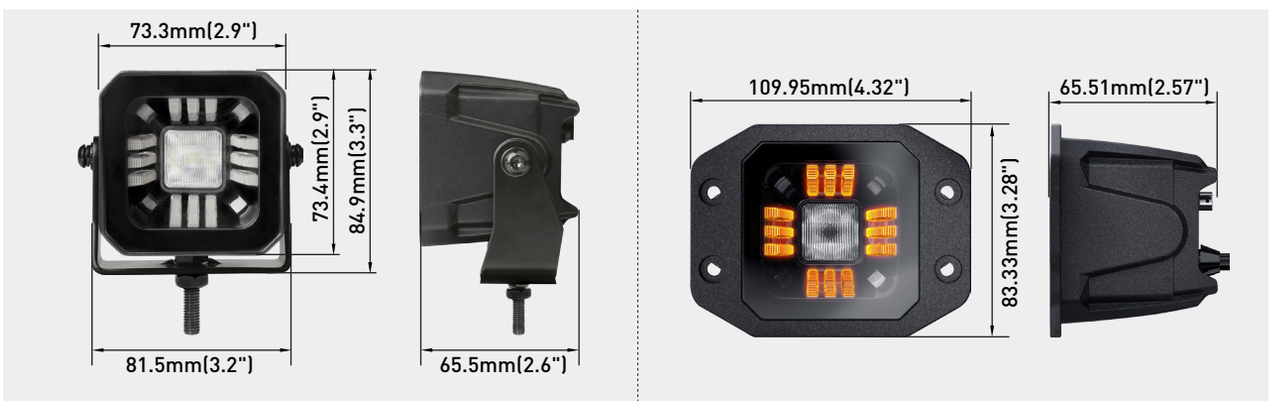


SPOT BEAM

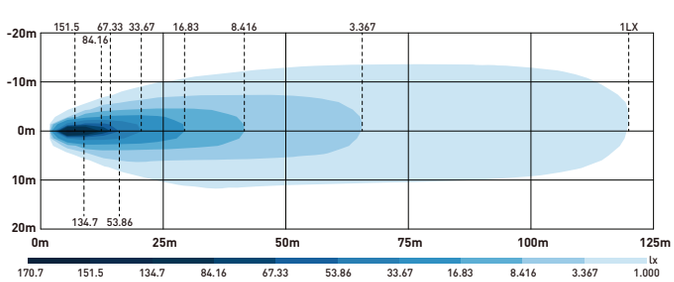

DRIVING BEAM

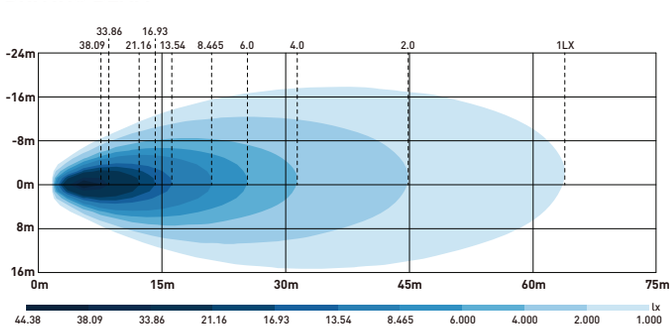

FLOOD BEAM

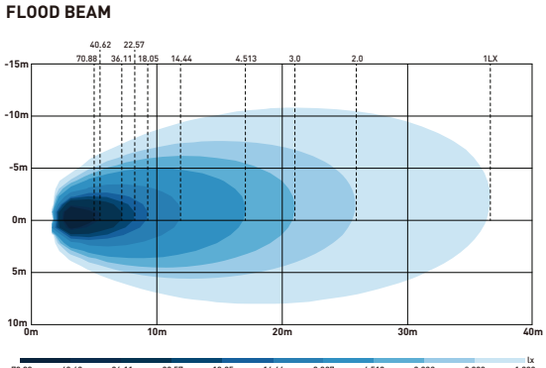

M-Tech Poland Sp. z o.o.
ul. Redena 10 41-807 Zabrze, Poland
+48 32 284 10 10
+48 32 757 11 99
info@m-tech.pl
www.m-tech.pl