

# LD955 LD956 LD957



Instrukcja montażu.



Mounting instruction.



Installationsanweisungen Tagfahrlicht.



Guida all'installazione.



Manual de instalación.



Notice de montage.




# Daylight Running Lights LD955, LD956 and LD957. Mounting instruction.


Thank you for buying M-Tech Daylight Running Lights. We do our best to make your driving safer and more comfortable. The product is made of high quality components to provide a long and non-failure use.

The product is covered by a one year warranty, provided that it is used as intended and according to the operating instructions. This DRL model is not compatible with start/stop system and hybrid cars.

## Product contents

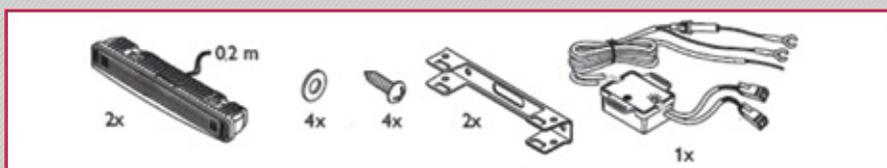


## Lamp positioning requirements

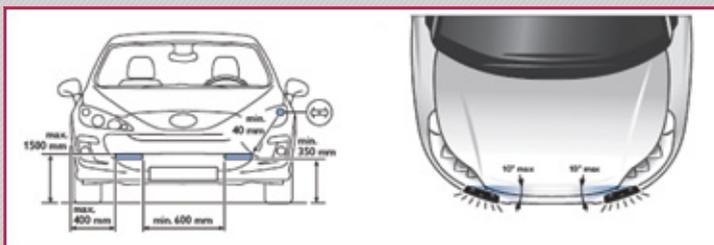

Make sure that the installation position of the lamps conforms to the diagram above. To adjust the lamps to the shape of the bumper you can lean the lamp and modify the horizontal tilting angle up to 10°.

## DRL operating principle


Daylight Running Lights turn on and off automatically. They start working immediately after turning the ignition key and stop working after switching on the dipped-beam headlights or after turning off the engine.

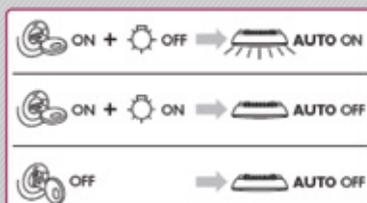

## Mounting instructions

Before installing the lamps try them in the car. Find the best position for each element. Sometimes you will need to cut a slot for the wires or for the lamp. Start by installing the brackets, than lay and connect the cables. Check whether the lamps turn on and work properly, finally fit them in the brackets.

## Wiring instructions

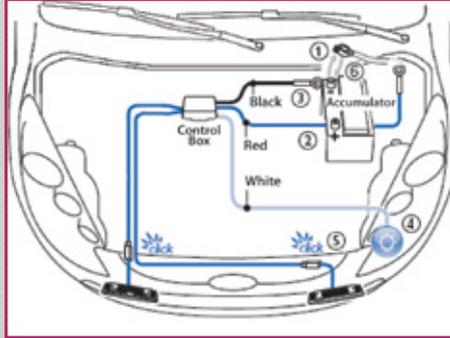


- 1) Turn off the engine and the headlamps. Remove the battery's grounding clamp(-).  
**WARNING: Disconnecting the battery can reset the settings of your car radio.**
- 2) Connect the red relay with the alternator, the ignition switch or any other place where the current passes after turning the ignition key. Thanks to this cable the lamps will turn on automatically.
- 3) Connect the black relay with the negative pole on the battery.
- 4) The white relay should be connected with the positive pole on parking lamps or low-beam headlamps. It is responsible for turning the DRL lamp off while driving at night.

## Warranty

The lamps are sold with a 12-month warranty with proof of purchase (receipt or invoice copy). The warranty covers manufacturing or material defects (LEDs, control box defects). It does not cover the defects resulting in inappropriate use and mechanical damage.

The purchaser must deliver the defective product at his expense. Manufacturer excludes the possibility of reimbursement of assembly and disassembly costs. The warranty period is not extended after replacement under warranty.

## Notices



Do not direct water under pressure directly on the daytime running lights.  
Do not use chemicals to clean them, clean with a damp sponge or cloth.



TECH

M-Tech Poland Sp. z o.o.

 ul. Redena 10, 41-807 Zabrze, POLAND

 +48 32 284 10 10  [info@m-tech.pl](mailto:info@m-tech.pl)

 +48 32 757 11 99  [www.m-tech.pl](http://www.m-tech.pl)