ILPRO603
M-TECH LAMPA INSPEKCYJNA
Instrukcja obsługi

Przed pierwszym użyciem należy upewnić się, że baterie są w pełni naładowane i rozładowane.

ŚRODKI OSTROŻNOŚCI:

- Nie używaj lampy w bezpośrednim sąsiedztwie łatwopalnych materiałów lub gazów.
- Upewnij się, że źródła światła nie są zakryte podczas użytkowania.
- Do ładowania lampy warsztatowej należy używać wyłącznie akcesoriów dołączonych do produktu.
- Lampę należy przechowywać poza zasięgiem osób nieupoważnionych, zwłaszcza dzieci.
- Nie wolno kierować światła bezpośrednio w oczy własne, innych osób lub zwierząt.
- Przed użyciem ładowarki należy zawsze sprawdzić kabel sieciowy. Jeśli kabel sieciowy jest uszkodzony, wymienić ładowarkę.
- Zużytych baterii nie należy wyrzucać wraz z odpadami domowymi, lecz oddać je do utylizacji w odpowiednim punkcie zbiórki.

KONSTRUKCJA LAMPY I AKCESORIA:

- 1000 lm białej diody LED COB, 6500K
- Dodatkowa latarka LED SMD 200lm
- Dodatkowa 1W dioda LED UV 395nm
- System wymiennych baterii (bateria posiada
- port ładowania USB C)
- Bardzo wytrzymała nylonowa i aluminiowa konstrukcja
- Obrotowa podstawa 90° z super mocną,
- magnetyczną podstawą
- Odporność na kurz i wodę IP54
- Super wytrzymała konstrukcja odporna na wstrząsy IK08
- Duży reflektor COB LED
- System ładowania 5V do ładowania akumulatorów
- Porty ładowania 2 w 1:
  Wbudowany port ładowania USB-C z ochronną
  ochronną lub port ładowania na baterii
- 4 wskaźniki poziomu naładowania baterii i ładowania
- Bezpośrednie ładowanie USB-C prądem 1A - 3,5 godziny czas ładowania
- W zestawie kabel ładujący USB-C o długości 1m
- Konstrukcja zapewniająca bezpieczeństwo :
  Ochrona przed ładowaniem i rozładowaniem
  Wysoka wydajność i niskie zużycie energii

DANE TECHNICZNE:

- 3,7V - akumulator, lit. 2500mAh
- LED :
  10W dioda LED wysokiej mocy
  Latarka LED o dużej mocy 2W
  1W UV LED 395nm
- Luminancja:
  Około 1000lm Główny przedni
  Górna latarka: ok. 200 lm
- Temperatura otoczenia: -10° - +45°C
- Okres użytkowania:
  3h do 12h dla głównej diody COB LED

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

ŁADOWANIE:

- Przed pierwszym użyciem lampy należy całkowicie naładować akumulatory.
- Lampa musi być ładowana co trzy miesiące, aby chronić żywotność baterii.

ŁADOWANIE ZA POMOCĄ ŁADOWARKI USB 5V DC:

- Podłącz zasilacz do głównej ładowarki USB
- Podłącz kabel ładowarki do gniazda USB-C (obudowa lampy). Stan naładowania akumulatora można określić poprzez odczytanie stanu baterii. Jeśli świecą się wszystkie 4 diody LED, bateria jest w pełni naładowana.
- Podłącz kabel ładowarki do gniazda USB-C akumulatora. Czerwona dioda LED wskaźnika akumulatora zaświeci się podczas ładowania. Po całkowitym naładowaniu baterii dioda LED zmieni kolor na zielony.

UŻYTKOWANIE:

WŁĄCZNIK-WYŁĄCZNIK

Przełącznik ON-OFF dla SPOT LED i Main COB

- Naciśnij 1: SPOT LED ON
- Naciśnij przycisk 2: Główna dioda COB 100% jasności
- Naciśnij 3: Główna dioda COB 50% jasności
- Naciśnij 4: Główny COB 25% jasności
- Naciśnij 5: OFF


Przełącznik ON-OFF dla diody LED UV

- Przytrzymaj dłużej niż 2 sekundy naciśnięty przełącznik, aby włączyć UV
- Naciśnij ponownie: OFF

Uwaga: Jeśli lampa pozostanie w dowolnym trybie przez ponad 5 sekund, kolejne naciśnięcie spowoduje jej wyłączenie.

HOW TO USE THE LAMP?

A. Punktowa dioda LED
B. Główne światło COB LED
C. DIODA LED UV
D. Port ładowania USB C akumulatora
E. Pokrywa baterii
F. Wskaźnik naładowania baterii
G. Gniazdo ładowania USB-C
H. Przełącznik
I. Silny magnes

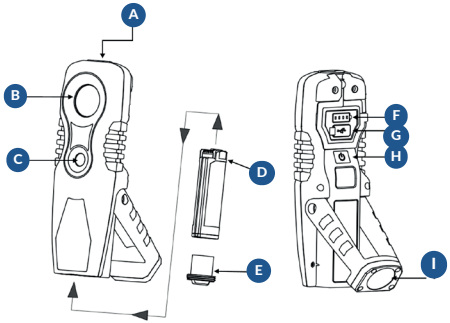

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

ILPRO603
M-TECH INSPECTION LAMP
User Manual

Before initial use, please ensure to fully charge and discharge the batteries

SAFETY PRECAUTIONS:

- Do not use the lamp in the immediate vicinity of inflammable materials or gases.
- Make sure that the illuminants are not covered during use.
- Only use the accessories included with the product for recharging your rechargeable workshop lamp.
- Keep the lamp out of reach of unauthorised persons, especially children.
- Do not point the light directly in your own or any other person's or animal's eyes.
- Always check the mains cable before you use the charger. If the mains cable is damaged, replace the charger.
- Do not dispose of used batteries with domestic waste, but leave them at an appropriate collection point for disposal.

LAMP DESIGN AND ACCESSORIES:

- 1000 lm white COB LED, 6500K
- Additional 200 lm SMD LED Torch
- Additional 1W UV LED 395nm
- Replacement battery System (Battery have USB C charging port)
- Ultra tough nylon, aluminium construction
- 90° Rotating stand with super strong magnetic base
- IP54 dust & water resistant
- IK08 super tough shock resistant construction
- Large reflector COB LED
- 5V charging system for recharging the batteries
- 2 in 1 charging ports:
  Built-in USB-C charging port with protective
  Cover or charging port at battery
- 4 Battery level and charging indicators
- 1A direct USB-C charging – 3.5 hours charge time
- 1m USB-C charging cable included
- Safety design :
  Charging and discharging protection
  High efficiency & Low power consumptiom

TECHNICAL SPECIFICATIONS:

- 3.7V – rechargeable battery, Lithium 2500mAh
- LED :
  10W High power LED LED
  2W High power LED torch
  1W UV LED 395nm
- Luminance:
  Approx 1000lm Front Main
  Approx 200lm Top Torch
- Ambient temperature: -10° - +45°C
- Usage period:
  3 h to 12h for Main COB LED
  8h for Spot LED
  12h for UV LED
- Protection class: III
- Charging input: 5V 1000mA
- Charging period: approx. 3.5h

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl

RECHARGING:

- Completely charge the batteries before your first use the lamp.
- The lamp must be charged per three months to protect the battery lifetime.

CHARGING WITH A 5V DC USB CHARGER:

- Plug the power supply into USB main charger
- Plug the charger cable into the USB-C socket (lamp housing). The battery charging status can be determined by reading the battery status. If all 4LEDs are lit, the battery is fully charged.
- Plug the charger cable into the battery USB –C socket. The battery indicator red LED will light up during the charge. Once the batteries are completely charged, the LED turns green

USAGE:

THE ON-OFF SWITCH

The ON-OFF switch for SPOT LED and Main COB

- Press 1st: SPOT LED ON
- Press 2nd: Main COB 100% brightness
- Press 3rd: Main COB 50% brightness
- Press 4th: Main COB 25% brightness
- Press 5th: OFF


The ON-OFF switch for UV LED

- Kept more than 2s pressed the switch to on the UV
- Press again : OFF

Note: If left in any mode for over 5 seconds , the next press will turn the light OFF

HOW TO USE THE LAMP?

A. Spot LED
B. Main COB LED light
C. UV LED
D. Battery USB C charging port
E. Battery cover
F. Battery power indicator
G. USB-C Charging socket
H. Swtich
I. Strong Magnet

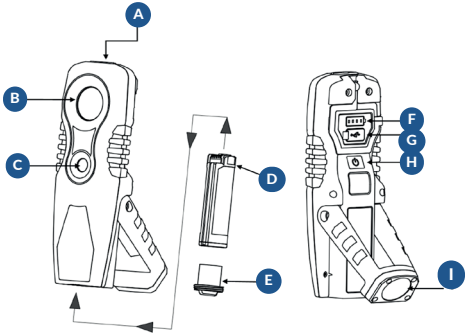

M-TECH Poland Sp. z o.o.
ul. Redena 10 41-807, Zabrze, Poland
+48 32 284 10 10
+48 32 428 42 80
info@m-tech.pl
www.m-tech.pl