


# LDO225 LDO506 LDO507 LDO725



Instrukcja montażu.

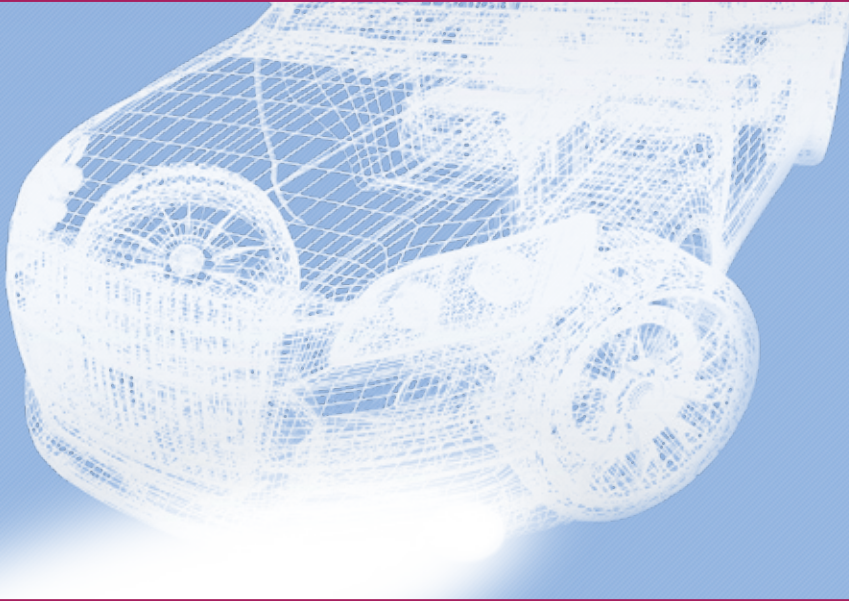

Mounting instruction.



Montageanleitung Tagfahrlicht.



Guida all'installazione.



Manual de instalación.



Notice de montage.




# Daylight Running Lights LDO225, LDO506, LDO507 LDO725. Mounting instruction.

Thank you for buying M-Tech Daylight Running Lights. We do our best to make your driving safer and more comfortable. We strive to make our products of high quality components to provide a long and non-failure use. The product is covered by a one year warranty, provided that it is used as intended and according to the operating instructions. This DRL model is not compatible with start/stop system and hybrid cars.

## Product contents




## Lamp positioning requirements

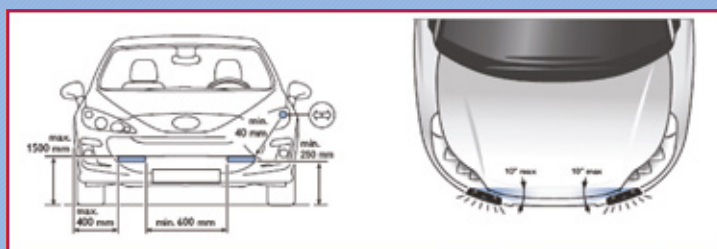

Make sure the installation position of the lamps conforms to the diagram above. To adjust the lamps to shape of the bumper you can lean the lamp and modify the horizontal tilting angle up to 10°.

## DRL operating principle


Daylight Running Lights turn on and off automatically. They start working immediately after turning the ignition key and stop working after switching on the dipped-beam headlights or after turning off the engine.

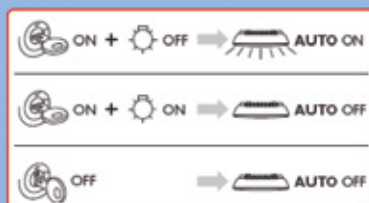

## Mounting instructions

Before installing the lamps try to fit them in a car. Find the best position for each element. Sometimes you will need to cut a slot for wires or the lamp. Start by installing the brackets, then lay and connect the cables. Check whether the lamps turn on and work properly. Finally fit them in the brackets.

## Wiring instructions

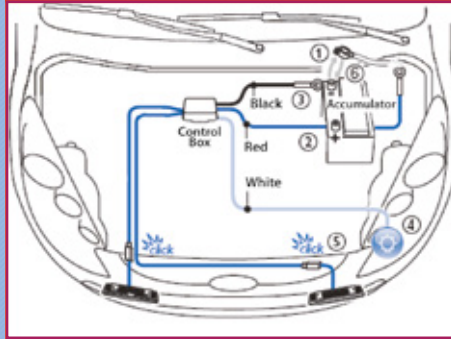

- 1) Turn off the engine and the headlamps. Remove the battery's grounding clamp (-).  
**WARNING: Disconnecting the battery can reset the settings of your car radio.**
- 2) Connect the red wire to the current source, ex. battery, ignition switch. The lamps will switch on automatically if connected properly.
- 3) Connect the black wire to the negative pole on the battery.
- 4) The white wire should be connected to the positive pole on parking lamps or low-beam headlamps. It is responsible for turning the DRL off while driving at night.

## Warranty

The DRL are sold with a 12-month warranty with proof of purchase (receipt or invoice copy). The warranty covers manufacturing or material defects (LEDs, control box defects). It does not cover any defects resulting in inappropriate use and mechanical damage. The purchaser must deliver the defective product at his expense. Manufacturer excludes the possibility of reimbursement of assembly and disassembly costs. The warranty period is not extended after replacement under warranty.

## Notices





Do not direct water under pressure directly on the Daytime Running Lights.  
Do not use chemicals to clean them. Clean with a damp sponge or cloth.




TECH

M-Tech Poland sp. z o.o.

 ul. Redena 10, 41-807 Zabrze, Poland

 +48 32 428 10 10

 [info@m-tech.pl](mailto:info@m-tech.pl)

 +48 32 757 11 99

 [www.m-tech.pl](http://www.m-tech.pl)